

# X260SD Amphibious Excavator



**High Efficiency, Low Fuel Consumption, Stable Performance, Low Ground Pressure.** Powerful high-efficiency engine with low fuel consumption and high reliability.

High torque travelling pontoon devices ensure strong driving force, low ground pressure and high maneuverability. A humanized cab with air conditioning, USB compatible audio and great all-round visibility ensures a comfortable work environment.

## TECHNICAL PARAMETERS

Specifications	
Operating Weight	26,000 kg
Bucket Capacity	0.9 m <sup>3</sup>
Boom Length	5,680 mm
Arm Length	2,912 mm
Chains	2
Engine	
Model	Isuzu 6BG1
Type	Inter-Cooled Turbo
Power	114 kw / 2,100 rpm
Max. Torque	629 Nm / 1,600 rpm
No. of Cylinders	6
Displacement	6.494 L




Hydraulic System	
<b>Main Pump</b>	
Type	Variable Plunger Pump
Max. Displacement	2 * 107 cm <sup>3</sup> / r
Working Pressure	32 MPa
<b>Hydraulic Motor</b>	
Slew Motor	Fixed Plunger
Travel Motor	Variable Plunger
Oil Tank Capacity	
Fuel Tank	376 L
Hydraulic	219 L

## TECHNICAL PARAMETERS

Performance	
Slew Speed	11 rpm
Min. Slew Radius	3,554 mm
Max. Travel Speed, H / L	5.4 km/h • 3.29 km/h
Gradeability	35°
Tracktive Effort	279.8 kN
Max. Digging Force, Bucket	98.3 kN
Max. Digging Force, Arm	63.5 kN
Ground Pressure	0.15 kg / cm <sup>2</sup>

Item	Standard (mm)
A. Length of Pontoon	8,083 mm
B. Platform Ground Clearance	2,002 mm
C. Overall Height	3,826 mm
D. Boom Transport Ht.	3,390 mm
E. Overall Length	10,502 mm
F. Rear Swing Radius	2,800 mm
G. Track Gauge	3,643 mm
H. Overall Width	4,600 mm
I. Width of Pontoon	1,490 mm
J. Min. Ground Clearance	1,192 mm
K. Height of Pontoon	1,718 mm
L. Width, Upper Structure	2,867 mm
M. Ground Length	4,787 mm

Item	Standard (mm)
a. Max. Digging Reach	9,925 mm
b. Max. Digging Reach on Ground	9,540 mm
c. Max. Digging Depth	5,704 mm
d. Max. Vertical Digging Depth	5,125 mm
e. Max. Digging Height	10,577 mm
f. Max. Dumping Height	7,810 mm
g. Min. Front Slewing Radius	3,554 mm

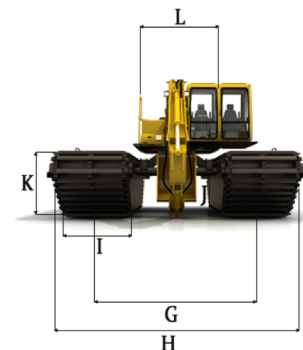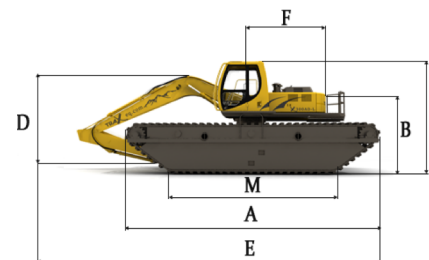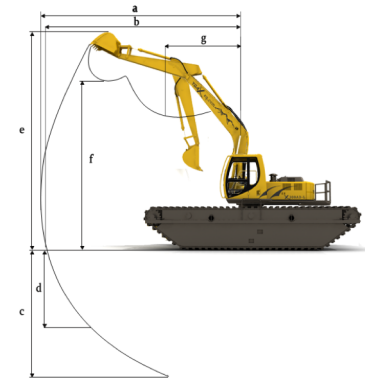

The manufacturer reserves the right to change the technical specifications without notice.